
Water Quality Monitoring Field Manual

Yukon River Inter-Tribal Watershed Council • Science Department • 2020

"to once again drink water directly from the Yukon as our ancestors did"



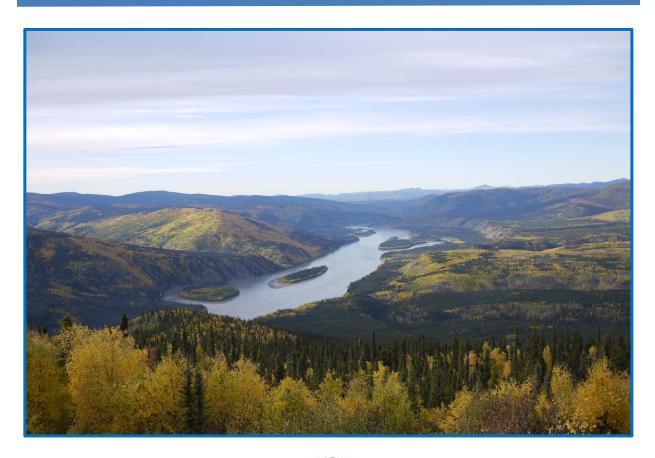

Yukon River Inter-Tribal Watershed Council

The Yukon River Inter-Tribal Watershed Council (YRITWC) is an Indigenous grassroots organization, consisting of 74 First Nations and Tribes, dedicated to the protection and preservation of the Yukon River watershed. The YRITWC accomplishes this by providing Canadian First Nations and Alaskan Tribes in the Yukon watershed with technical assistance, such as facilitating the development and exchange of information, coordinating efforts between First Nations and Tribes, undertaking research, and providing training, education and awareness programs to promote the health of the watershed and its Indigenous peoples.

Manual Overview

This manual is a reference tool for technicians conducting water sampling under the YRITWC protocols. The YRITWC protocols were developed using the United States Geological Survey (USGS) protocols as a benchmark for quality (USGS, TWR Book 9). The structure set forth here will be one that focuses on end-user functionality. Throughout the manual key points will be noted with special characters and text boxes in the body of the text. This will highlight essential material and give resources for additional research.

Acknowledgements

This work would not be possible without the collaboration of many individuals, communities, government agencies and funding sources. Through this collaboration, the YRITWC has established a long-term database of water quality monitoring that covers the entire Yukon River Watershed. At several sites, monitoring began as early as 2001. Through consistent sampling you benefit your community and also other communities upstream and downstream. The YRITWC greatly appreciates all the hard work and dedication of the Environmental Coordinators, Lands and Resources Departments, and their staff to collect water quality samples throughout the summer and winter. Without their (your) dedication, this network would not exist. The YRITWC would also like to recognize the contribution of the Environmental Protection Agency's Indian General Assistance Program that funds many of the Environmental Programs to collect and report this data. The YRITWC also greatly appreciates the collaboration with the USGS Water Resource Mission Area and Alaska Climate Adaptation Science Center. For over ten years now, the USGS has provided an immense contribution to this network by providing almost all of the laboratory analysis for the water quality samples. Since, 2019 we have been delighted to welcome the University of Alaska Fairbanks (UAF) project partners with their expertise that will contribute to the Indigenous Observation Network (ION) chemical laboratory analysis and active layer dynamics research capacity. The National Science Foundation, Administration for Native Americans, Health Canada, Yukon Government, Environment Canada, and the Gordon Foundation have all provided substantial funding to assure the sustainability of the ION and its water quality program. Finally, we would like to thank USGS, National Geographic, and BSCS Science Learning for the development of our water quality database.

TABLE OF CONTENTS

Overviev	N	1
Getting :	Started	5
	Asking a Question	5
	Quality Assurance Plan	6
	Contact YRITWC	6
	Next Steps	7
	Training	7
	Purchasing Equipment & Supplies	7
	Choosing a Site	7
	Naming the Site	8
Calibrati	on	9
	Introduction	9
	Calibrating YSI Professional Plus (YSI PRO)	10
	Calibrating pH - YSI PRO	10
	Calibrating Conductivity - YSI PRO	11
	Calibrating Baromete YSI PRO	13
	Calibrating DO % - YSI PRO	14
Field Sa	mple	15
	Introduction	15
	Field Sheet (Appendix C)	15
	Date & Time	15
	Site Naming Convention	15
	General Information Technicians, Waterbody Name and Elevation	16
	Calibration	17
	Field Measurements	17
	Comments and Observations	17
	Bottle Check List	17
	FieldScope	18

	Pictures	18
	Field Blank and Duplicates	18
Field Mea	asurements	19
	Open Water	19
	Gear Check List	19
	From the Boat	19
	From the Riverbank	19
	YSI PRO Measurements	20
	Water Sample Collection	21
	Sample Rod Assembly	21
	Collecting Water Samples from a Boat or Riverbank	22
	Under Ice	23
	Gear Check List	23
	Drilling the Ice Hole	23
	Meter Measurements	24
	Ice Thickness Measurements	24
Filling Sa	ample Bottles	25
	Rinsing the Syringe	25
	Filtered Bottles	26
	Stable Water Isotopes	27
	Labeling Sample Bottles	27
Quality C	Control	28
	Blank Samples	28
	Duplicate Samples	29
Shipping	Samples	30
Appendic	ces	31
	Appendix A: Solution Temperature Chart	31
	Appendix B: Water Quality Sites	32
	Appendix C: Field Sheet (YSI 63 and YSI 550)	36
	Appendix D: General Explanation of the Water Quality Parameters	38

Appendix E: Resources	43
Equipment Retailers	43
Online Tools	43
Appendix F: Budget Recommendations	44

Getting Started


Asking a Question

All science research starts by someone asking a question. Most questions that we receive revolve around water and if you are reading this manual the odds are that you and your community are interested in what is going on in the Yukon River watershed.

The Water Quality Monitoring Program managed by the YRITWC Science Department was started because people of the Yukon River Watershed asked questions about the water. What is happening to the fish? Is the water safe to drink? Why is the water changing? All these questions, and more, led to the development of a baseline watershed study that has been operating continuously since 2006.

Developed through collaboration and assistance by the USGS, the baseline Water Quality Monitoring Project has spread to over 54 communities across the entire Yukon River watershed.

Map of communities in the Yukon River Watershed

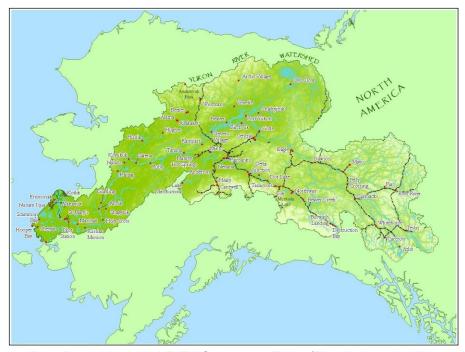

Yukon River Basin Map with YRITWC signatory Tribes/First Nations highlighted

This project focuses on collecting information on basic water quality parameters (see Appendix D) that give a picture of the overall health of the water system, including fish habitat and responses to climate change. Long-term baseline studies are important for several reasons. They provide a basis for comparison against possible contaminants in the river, as well as document long-term trends that can be useful in highlighting natural versus unnatural changes in the water system. You can access the ION database for

the long-term baseline data at the USGS ScienceBase https://www.sciencebase.gov/catalog/item/573f3b8de4b04a3a6a24ae28 or check out the FieldScope online platform site at http://yukon.fieldscope.org/. All community water quality reports and USGS factsheets and reports can be uploaded directly from YRITWC website https://www.yritwc.org/reports.

If you have a question about the ION database or community reports, please feel free to contact us. We would also like to hear from you, if there are any water quality concerns around your community to explore how we help to find answers to those concerns. Maybe you can even help start a new initiative in the watershed. Sometimes answers take time to reveal themselves, but be patient and have fun taking observations and learning more about the environment you live in!

Quality Assurance Project Plan (QAPP)

The YRITWC Science Department has revised a Quality Assurance Project Plan (QAPP) for the ION water quality baseline project that covers the sampling conducted by communities and YRITWC staff in spring 2020. A QAPP is specifically required by projects funded through the Environmental Protection Agency (EPA) to ensure that the project and tasks are documented and reviewed before work is started.

If your project is addressing additional questions or requires protocols for site specific contaminant sampling, please contact us and we help you to develop your own QAPP or amend the existing one to include all the criteria within your project.

The QAPP describes the quality assurance procedures, quality control specifications and other technical activities that must be implemented to ensure that the results of the project or task to be performed will meet project specifications (https://www.epa.gov/r10-tribal/quality-assurance-project-plans-tribes-region-10 and https://www.epa.gov/quality/quality-assurance-project-plan-development-tool).

Contact YRITWC

Once you have asked a question and desire to pursue projects that will help to give insight to the topic, contact the YRITWC! We can assist at multiple levels to help you meet your community goals. Whether you need to develop your project or would like to take part in the ION program, the YRITWC will do our best to assist communities in answering their question(s).

The YRITWC office in Anchorage is staffed with knowledgeable employees who are eager to talk with you about ways your community can participate in YRITWC programs. The Science Department will assist in guiding you towards programs that will best answer the questions from your community.

Anchorage Office:

Science Staff: Edda Mutter (<u>emutter@yritwc.org</u>) Kari Young (<u>kyoung@yritwc.org</u>)

Address:

725 Christensen Drive, Suite 3 Anchorage, AK 99501 Phone: (907) 258-3337; Fax: (907) 258 3339

Next Steps

Training

Once you have your question and have decided which projects best fit your community needs, it's time to attend training! The Science Department offers annual training in water quality sampling. Contact the YRITWC to find out when the next training opportunity will be. Generally, the water quality trainings are held in spring. We are often able to work around schedules and provide on-site training in a community if necessary.

Purchasing Equipment & Supplies

Your equipment and supply needs will be met through participation in the Science Department's projects. The YRITWC can typically provide equipment and basic maintenance, as well as provide most of the necessary supplies to complete project goals. This service is entirely funded through grant opportunities, which vary from year to year. If your project budget is designed to support (even partially) the equipment, supply and shipping needs you can be assured that your project will be sustainable throughout your participation (see budget recommendation in Appendix F). We are constantly seeking new funding to support the long-term projects and goals of the YRITWC and the Science Department, so please do not let shortfalls in your budget stop you from participating.

There are several manufacturers of water quality instruments currently on the market. Manufacturers include: Hydrolab, YSI Inc., Eureka, Oakton, Hanna, and Hatch. Each manufacturer produces several types of equipment, from single parameter probes to multi-parameter and sondes*. The level of sophistication of each probe depends on the type of parameters being measured and the needs of the user (see Appendix D for explanation of parameters). The type of probe selected for each project will depend on the time and frequency of data collection. This manual explains how to calibrate the meter you will be using this field season. Calibration directions begin on page 8 of this manual. Also, technical manuals can often be found online for each meter.

*If you are considering buying equipment for your IGAP program please talk with the YRITWC Science Department staff and we will be glad to explore options on equipment that will fit the long term needs of your community (see Appendix E for equipment suppliers).

Choosing a Site

Site location is extremely important when collecting water samples. The flow of the river, the location relative to the community, potential contaminants, accessibility and the question(s) you are asking all need to be taken into consideration when choosing the site.



Leah Mackey, collects water sample by canoe on the Tanana River in

When participating in the baseline project, YRITWC staff will assist in choosing a site that best meets all criteria. The initial site will be located above the community in the main channel of the river. This sample will provide the most accurate information on the water flowing past your community.

Naming the Site

Each site is assigned a unique name based on the river, community and location relative to the community (see Appendix B for list of current sites). The naming convention was developed as a method to efficiently identify the river, the community, and the site through a single reference. The structure of the system is in four distinct parts. First, the river is identified using the first two letters of the river from which the sample was taken. Second, the community is identified by the three-letter airport code from where the sample will be shipped. Third, the site number is identified using chronological numbers starting at 1. The fourth component is the letter "a" or "b", which identifies the site as being <u>above</u> the community, "a", or <u>below</u> the community, "b", from where the sample was taken.

An example of the naming convention would be: Yukon River (yu), Village of Eagle (eaa), site number (1), above Eagle (a). This site would be written on the field sheet as: yueaa1a.

Calibration

Introduction

Calibration is the act of comparing the readings of an instrument with those of a known/reference standard to check the instrument's accuracy. Adequate documentation of standards and procedures is essential for any use of environmental instrumentation to conduct physical measurements. Correctly following the calibration procedures and providing accurate documentation allows the measured data to be checked using quality assurance methods and is essential to assuring high quality data.

When to Calibrate: Calibration of the YSI 63 and 550 instruments will occur once just right before using the instrument in the field to collect the measurements/readings from the river or water source. Documenting the calibration is equally important as going through the calibration procedures. Documentation is completed on the field sheet that is provided with the sample kits sent to you. On the field sheet you will find a designated section for recording the calibration data (see Appendix C). Carefully follow the instructions described in the following pages! While calibration and documentation are essential for collecting high quality and accurate data, basic care is equally important to ensure instruments performs high-level work.

The equipment we use are top-of-the-line scientific instruments that will display high quality data points when calibrated correctly and cared for respectfully. Instruments should be stored inside a heated building and care should be taken to protect and preserve all working parts. Further details will be outlined for each instrument in the following sections.



Hazel Lolnitz, Koyukuk Tribal Council, calibrates a YSI 63 during a water quality training in Fairbanks.

The calibration of equipment is essential to collecting physical field measurements accurately!

Bad Calibration = Bad Data

Instruments

YSI Professional Plus (YSI Pro)



YSI Professional Plus handheld multiparameter instrument will measure pH, Dissolved Oxygen (DO), conductance, and water temperature.

The YSI Pro meter will be stored with the calibration cup attached with a small amount of pH 4. Be sure to rinse and replace the calibration cup with a small amount of pH 4 when you finish sampling for the day. This protects the sensors from drying out.

DO probe →

Temp. probe →

Always use clean, properly stored calibration solutions (~25°C or room temp.). Check expiry date before first use.

Calibrating pH

You will need: pH 7, pH 10, distilled water and the calibration cup.


1. Power on by pressing green button.



- 2. Rinse calibration cup twice with distilled water.
- 3. Rinse calibration cup with small amount of pH 7.
- 4. Fill calibration cup with pH 7 to the "fill line" marked on the cup or just over half of the calibration cup.



- 5. Screw calibration cup onto probe and invert so gray cap is pointing up. (Be sure the pH probe is completely covered in solution.)
- 6. Press **CAL** and select "**ISE1 (pH)**" and press the Enter button.
- 7. Check the "Calibration value" on your screen with the Buffer Solution Temperature Chart (found in Appendix A *OR* on the side of the pH buffer solution bottle). If value needs adjusted proceed to step 8. If value is accurate skip to step 12.



- 8. Select "Calibration value" and press Enter. The screen will display a number pad.
- 9. Using the solution temperature (found on the screen under "Actual Reading") find the corresponding pH 7 value in the chart. Using the arrow pad and enter button to put in the correct pH value. *Note: Select the decimal point as well. It can be difficult to see.
- 10. Once the value is correct, select "Enter" on the screen and press the Enter button on the keypad.
- 11. Allow value under "Actual Reading" to stabilize. Select "Accept Calibration" on the screen and press the Enter button.
- 12. Press **CAL** to finish. Once the display returns to the main screen record the pH and temperature values on the pH 7 section of the field sheet.
- 13. Discard pH 7 solution from calibration cup. Rinse cup twice with distilled water.
- 14. Rinse calibration cup with small amount of pH 10.
- 15. Fill calibration cup with pH 10 to the fill line or just over half of the calibration cup.
- 16. Follow steps 5 12 outlined above using the pH 10 temperature chart and values found in Appendix A.
- 17. Press **CAL** to finish. Once display returns to main screen

record the pH and temperature values on the pH 10 section of the field sheet (see example below, in the Conductivity calibration section).





Main screen displaying values to record from calibration.

Calibrating Conductivity

You will need: Conductance Standard 1413 μ S/cm, the calibration cup and distilled water.

- 1. Rinse calibration cup twice with distilled water.
- 2. Rinse calibration cup with small amount of 1413 μ S/cm Conductance solution.



- 3. Fill calibration cup with 1413 μ S/cm Conductance solution to the "fill line" marked on the cup or just over half of the calibration cup.
- 4. Screw calibration cup onto probe and invert so gray cap is pointing up. (Be sure the pH probe is completely covered in solution.)
- 5. After placing the probe into the 1413 µS Conductance solution, gently move the probe up and down to remove any air bubbles that may be trapped in the conductivity probe.







- 6. Press CAL and select "Conductance" picture A and select "Conductance Unit C µS/cm" picture B. Press the Enter button after your selection.
- 7. Enter the "Calibration value" of the 1413 μ S/cm Conductance solution as it is listed on the Temperature Chart (found in Appendix A OR on the back of the 1413 μ S/cm Conductance solution bottle). If value needs adjusted proceed to step 8. If value is accurate skip to step 12.
- 8. Select "Calibration value" and press Enter. The screen will display a number pad.
- 9. If you receive a warning message stating that the calibration is questionable, do not continue with the calibration. Instead, select "**No**" and investigate what is causing the questionable results. If you accept a questionable calibration, your conductivity readings (and your DO mg/L readings) will be erroneous. Typical causes for this error message include: incorrect entries (entering 1413 μS/cm instead of 1.413 mS/cm), not using enough solution to cover the vent holes, air bubbles trapped in the sensor, calibrating in specific conductance instead of conductivity, dirty conductivity electrodes, and/or bad calibration solution.
- 10. Once the value is correct, select "**Enter**" on the screen and press the Enter button on the key pad.

- 11. Allow value under "Actual Reading" to stabilize. Select "Accept Calibration" on the screen and press the "Enter" button.
- 12. Once the calibration is finished and the display returns to main screen record the Conductance and Temperature values on the field sheet (see example below, in the Conductivity calibration section).
- 13. Discard solution and rinse calibration cup with distilled water.



Example of field sheet with calibration section completed

Cali	bration Data	
pH Calibration (YSI 63, YSI Pro, YSI 650, and Hanna)	pH 7 and 10 need to be within 0.1 of buffer values, if not R	ECALIBRATE!
pH 7 Buffer Reading:	pH 10 Buffer Reading: _	10.00
pH 7 Buffer Temperature (°C):24.7°C	pH 10 Buffer Temperature (°C): _	
Dissolved Oxygen (DO) Calibration (YSI Pro, YSI 650		
Barometric Pressure (inHg or kPa):	DO Reading (%) Saturation:	_
In US, visit www.weather.gov for air pressure in inHg.	DO % needs to be between 95 - 105%, if not H	RECALIBRATE
In Canada, visit www.weather.gc.ca for air pressure in kPa.	DO Reading (mg/L):	_
Conductivity Calibration (YSI 63, YSI 650, Hanna)		
Conductivity Standard Used (µS/cm): 443 us/cm	Conductivity Solution Temperature (°C):	25.0°C
Conductivity Reading (µS/cm): 444 uS/cm		

Calibrating the Barometer

The barometer of the YSI Pro will need to be calibrated to your location/elevation before the first sample. This is typically done only one time at the beginning of the season.

You will need: The barometric pressure in your location. This can be found online through a local weather report or by visiting **www.weather.gov** and type in your zip code for your community's air pressure in inches of mercury (inHg).

- 1. With power on, press CAL.
- 2. Select "DO" and press Enter. Then Select "DO%" and press Enter.


- 3. Highlight "Barometer" on the screen and press Enter. Manually enter the barometric pressure you obtained online for your location. This will mostly likely be shown as a value of "inHg" (inches of Mercury). Select "Enter" and press Enter.
- 4. Continue with Steps 4 8 listed below in the Calibrating DO% to complete calibration.

Calibrating Dissolved Oxygen (DO %)

You will need: small amount of distilled water and calibration cup.

- 1. With power on, press CAL.
- 2. Select "DO" and press Enter.
- 3. Select "**DO**%" and press **Enter**.
- 4. Fill clean calibration cup with a small amount of water (about a 1/2 inch).
- 5. Screw calibration cup onto probe and shake for a few seconds. Unscrew the cap a few times, so that it is threaded loosely, but still connected.
- 6. When "Actual Reading" values are stable on the screen press Enter.
- 7. Screen says "Calibrating channel" at the bottom and returns to main screen display when complete.
- 8. Record the Barometer value inHg, **DO** % value and the **DO mg/L** value in the DO calibration section of the field sheet (see example below).

Example of field sheet with calibration section completed

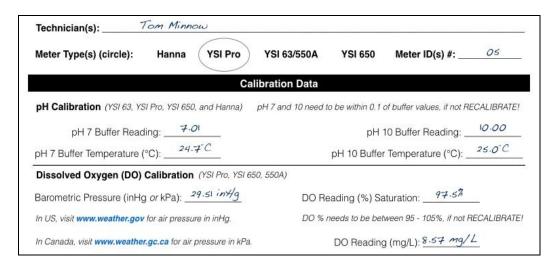

Field Sample

Introduction

After successfully calibrating your instrument you are ready to go collect your water sample! There are several steps to take to ensure you are collecting the best sample possible.

Field Sheet (Appendix C)

Field Sheet Documentation:



Elli Matkin records sampling information on the field sheet.

Filling out the field sheet completely is very important. The field sheet serves as a quality assurance method by documenting the calibration and is also a hard copy documentation of the data collection. Keeping consistent and reliable records are important in long-term data collection. If you make any mistakes, remember not to erase, just draw a line through the mistake and write the correction as close as possible.

Date and Time:

To work toward the standardization of protocols across the watershed, the YRITWC Science Department uses the International Standards Organization (ISO) standard for date and time records. This standard is accepted as the format for international trade. In our application, Indigenous peoples of the Yukon Basin are engaging in the trade of information to sustain their traditional way of life.

The international standard for recording the date, as set by the ISO, ranks the priority of information from the most important to least important; the year being the most important, the month being second in priority, and the day being of the lowest priority. The format for the date would be: **yyyy-mm-dd**. This format should be used when recording the date on the field sheet and sample bottles.

The use of 24-hour time is standard practice in scientific data collection. Using 24-hour time reduces the potential for transmission error when recording field data into a database and allows for accurate record keeping when samples are taken at multiple times in a single day. *On the field sheet record the time you collected the water sample from your site*. Use this same time for documentation throughout the duration of your samples (i.e. labeling bottles).

Site Naming Convention:

The naming convention was developed as a method to efficiently identify the river, the community, and the site with a single reference. This method is described earlier in the manual under the "**Next Steps**" section (for list of all existing sites see Appendix B).

An example of the naming convention would be: Yukon River (yu), Eagle (eaa), site number (1), above Eagle (a). This site would be written on the field sheet as: yueaa1a.

General Information: Technicians, Waterbody Name, Meter and Elevation:

Fill out these sections of the field sheet completely. It is important to know who is taking the sample. The <u>technicians</u> are *you* and any volunteers, assistants, youth or boat drivers. The <u>water body name</u> refers to the name of the river, lake or slough that the sample is being taken from. In the example below, the sample is from the Tanana River. The <u>meter type</u> is important for us to know for many reasons, largely because the YRITWC has multiple kinds of meters that samplers use and different ones are capable of measuring different parameters. After you circle which type of meter you are using, locate the number written on the side of the meter with a permanent marker. This is the <u>meter number</u>. Every YRITWC meter has a different number; this helps us keep track of which specific meter is in what location in the watershed.



Site Coordinates: Latitude, Longitude, and Elevation:

Before you put your meter in the water, write down the coordinates and elevation of your site at each visit. The latitude, longitude and elevation for each site are listed in Appendix B. If you have a GPS (sorry, the YRITWC does not provide one) we recommend that you check the accuracy of the coordinates listed in the appendix, this way we can be sure that you are sampling in exactly the same place week after week, year after year. Fill out the Latitude/Longitude section on your field sheet - especially if you are sampling a new location, adding a site or need to alter your location for any reason. If you sample from the riverbank once or twice (due to weather, boat problems, etc.) it is also helpful for us to know the GPS coordinates of that shore location since it is different from your usual sample site.

Calibration:

The calibration section of the field sheet is explained in more detail for each meter in the Calibration section of the manual (starting on page 8). Your field sheet will look like one below:

Field Measurements:

The field measurements are the reward for all your work calibrating and collecting the samples. These measurements provide real-time information to supplement the water sample you collect.

Field Data							
8.24	Air Temperature (°C): _	15.3°C	_ Latitude: _	N 64.7828			
n/a		11.00	_ Longitude: _	W 141.1767			
n/a	Ice Thickness (cm): _	n/a	Elevation (m):	268 M			
	70	n/a Water Temperature (°C): _	n/a Water Temperature (°C):	n/a Water Temperature (°C): Longitude: _			

Comments & Observations:

The reverse side of the field sheet provides an opportunity for you to write any additional comments or observations that you have during your sample trip. There are some guided guestions that you may find useful. Documenting observations alongside instrument data helps in explaining or understanding the numbers produced from the meters and laboratory analysis. Your experience, knowledge first-hand observations are a very important part of the documentation process. To the right is an example of answers for questions on the field sheet.



Bottle Check List:

The final section of the field sheet provides a space to double check that all the sample bottles were filtered and filled correctly. The checklist provides a description of each sample bottle and the parameter to be analyzed in the laboratory. Check off each bottle

as you complete the filtering process. If you encounter any issues during your sampling, please make a note on the field sheet.

Parameters	Anions big plastic bottle	Cations tall, thin plastic bottle	Nutrients small plastic bottle	Nutrients small amber glass bottle	DOC large amber bottle	Isotopes tiny glass vial		
Samples Collected (check)	×	×	×	×	×	×		
	6000	8352		1,400		19975		
d you enter your field measure	ements into F		-	scope.org/v3		YES		
d you enter your field measure d you take photos and email th		FieldScope at	yukon.fields					

FieldScope:

The YRITWC would like to introduce BSCS Science Learning FieldScope, an interactive online map and database. This new database stores your water quality field data and observations. This exciting tool allows you to add your site's pH, dissolved oxygen, conductivity, temperatures, photos, videos, field observations, and local knowledge. We hope FieldScope will be a very useful tool for samplers to share water quality data with all ION participants across the Yukon River watershed. You can choose to make your community's information private or open to all public viewers. Tell us what you think of FieldScope. We would love your feedback! Visit the Yukon River watershed at yukon.fieldscope.org/v3/.

Pictures:

Please take pictures while you are out in the field to record any changes occurring at the site and email them to Science staff at emutter@yritwc.org or kyoung@yritwc.org. We also love to see pictures from you in action! We really would appreciate it, if you are open to letting us use your pictures for reporting and publication purposes. Please clarify that in your email and we will send you a consent form. We hope to continue assisting the Indigenous Observation Network for years to come, and for funders, pictures are powerful evidence of the program's success! Feel free to add your photos to FieldScope as well.

Field Blanks and Duplicates:

Once or twice a season you will have to fill field Blanks and duplicates. This will usually happen at the very beginning of the open water sampling season and the very end. See section "*Open Water*", below, for specific instructions on how to complete this task.

Field Measurements

Open Water:

Gear Check List

- ✓ Meter
- √ Sample kit (cooler, bottles & frozen ice pack)
- √ Thermometer
- ✓ Field sheet
- ✓ Nitrile Gloves
- ✓ Clip board with pencil
- ✓ Holding bottles
- ✓ Syringe
- √ 3-way valve & rubber tubing (optional)
- ✓ Sampling Rod (optional for safety and convenience)
- √ Filters
- ✓ Life jacket
- ✓ GPS (highly recommended if you have one!)
- ✓ Camera

From the Boat:

The ideal location to collect a water sample is from the main flow, typically in the middle of the river. If you have access to a boat to collect your water sample, your site will be located in the main channel and flow of the river. Position the boat as close to the center of the river as possible pointing the bow upstream and holding the same position. If the river velocity is high, you may have to let the boat drift with the current. Make all field measurements upstream from the boat and away from the motor, if the boat is equipped with one.



Once you have your boat or body positioned correctly and have recorded your latitude, longitude and elevation on your field sheet, you are ready to collect meter measurements.

From the Riverbank:

If you are unable to sample from the main flow of the river, a sample is better than no sample, so collecting from the riverbank is acceptable (make sure to note the location on your field sheet). Pick a location where river flow is not affected by eddies (straight river reach) or contaminated by upstream

point source pollution (sewage effluent, docks, boat landings, bridges, etc.). Wearing a life jacket, wade out into current as far, but as safely as possible. Always make field measurements with probes positioned upstream of you! This avoids influencing the water samples and field readings.

YSI Pro Meter Measurements:

- 1. Remove instrument from the pelican case.
- 2. Remove calibration cup from the end of the probe and carefully replace with the sampling cover.
- 3. Place probe in the water on the upstream side of the boat or your body (if sampling from shore); hold onto the handheld portion of the meter.
- 4. Power **On** the meter. This should take you to the main screen display and you will see values under each parameter.
- 5. Allow values to stabilize for at least 60 seconds.
- 6. Record the values from the screen in the "Field Sample" section of the field sheet (see page13 for example).

Water Sample Collection:

Wear Latex or Nitrile disposable gloves during water sample collection. Avoid touching the boat or anything besides sampling equipment. If the gloves become compromised, dispose and put on a new pair. The sample should be taken in the same location and similar manner as the meter values (see meter measurement descriptions from the boat and shore). Always collect the sample upstream from you and/or the boat engine.


Sample Rod Assembly:

If a sample rod is provided with your equipment, use this to collect a sample. By attaching the holding bottle to this extension you will be able to more easily collect the sample below the surface level. This method also allows for safer sample collection by reducing the amount of reach required over the side of the boat. The set-up with the 4-foot extension is also very useful for under-ice sampling.

To assemble the sample rod, slide the extension rod onto the holding bottle connector. Press firmly to secure the attachment. Attach the safety clip to the holding bottle connector (see picture below). The holding bottle will screw directly to the holding bottle connector.







Collecting Water Sample from a Boat or Riverbank:

The sample will be collected using the holding bottle attached to a 4-ft plastic rod. It is important that the bottle fills with water from below the ice level.

- 1) Connect bottle to the sample rod (see picture and description on 27). Not applicable for glass jar.
- 2) Rinse the holding bottle/jar with river water and discard water three (3) times.
- 3) To fill the bottle/jar, submerge below the surface of the water (approximately 12 inches if possible) and allow the bottle to completely fill with water (large bubbles will stop rising to the surface when it is full).
- 4) Disconnect the holding bottle from the sample rod (if applicable).
- 5) Replace lid and get ready to transfer water into sample bottles (See "Filling Sample Bottles" section on page 31).

The water sample is now ready to be filtered into the sample bottles. If the weather is below freezing, this will be easier to complete inside. Take the sample back to a warm place and immediately filter and fill the sample bottles. Keep the sample refrigerated or chilled at all times.

* This is a good time to rinse your syringe too! It must be rinsed three (3) times with river water before using it to fill your sample bottles. For detailed description on how to rinse your syringe see page 31.

Under Ice:

Collecting samples in the winter only adds a few more steps (and several more layers of clothing!), but generally follows the same procedures as open water sampling. Safety is a top priority any time during sampling, but be especially careful when traveling on the ice. Be aware of ice conditions and safe routes to the sample location. If in doubt, don't go out!

Gear Check List

- ✓ Meter
- ✓ Sample kit (cooler, bottles & frozen ice pack)
- ✓ Thermometer
- ✓ Field sheet
- ✓ Nitrile Gloves
- ✓ Clip board with pencil
- ✓ Holding bottle
- ✓ Long Rod
- ✓ Syringe
- √ 3-way valve & rubber tubing (optional)
- ✓ Sampling Rod (optional for safety and convenience)
- ✓ Filters
- ✓ GPS (highly recommended if you have one!)
- ✓ Camera
- ✓ Ice Auger with spare blades
- ✓ Auger fuel (Most augers take mixed fuel. Read instructions carefully)
- ✓ Warm Clothing

Drilling the Ice Hole:

- 1) Using an ice auger, drill a hole in the ice until you reach water.
- 2) Use the auger to "clean the hole" by dipping it into the water and pulling out several times. This pulls water up and out onto the ice and helps remove some of the ice chunks from the open hole.



Brendan Mulligan drills an ice hole on the Tanana River.

Meter Measurements:

The under ice measurement will be taken in the same location as the open water sample. Use a GPS or landmarks to find the sample location in the winter. You still want to be in the general location of the main flow of the river, even though it is under ice. Take care not to let the sensors on the instruments freeze, keep it warm! Ice build-up will cause inaccurate readings and has the potential to break the sensors.

Ice Thickness Measurements:

The thickness of the ice is important data to collect in the winter and it allows us to see if there are variations year after year. We are still perfecting the best method to measure how thick the ice is so you may be equipped with any number of measuring tools. However, the following instructions apply to all measuring rods.

- 1. You should have a long rod (up to 7 meters in length) with centimeters marked out. On one end of the rod there is a nail protruding outward. Lower this end down into your ice hole.
- 2. Hook the protruding nail under the bottom of the ice. Make sure it doesn't move.
- 3. Look at where the top of the ice (the surface on which you are standing) meets the rod. Using this as a reference, mark on your field sheet how many centimeters thick the ice is.


Filling Sample Bottles

Now that you have collected the water sample in the holding bottle, you are ready to transfer the water into the individual sample bottles. This can be done immediately onsite or as soon as possible in another location that may be more convenient (i.e. office, vehicle, riverbank, etc.).


The following method for filling the sample bottles will be the same for under-ice and open water sampling. Always wear Latex or Nitrile disposable gloves when handling and filling sample bottles.

Rinsing the Syringe:


The syringe and connecting tube should be rinsed at the beginning of each new sample location. Do not stick the syringe directly into the holding bottle. If this is your only option (i.e., no tubing or valve), make sure the syringe is rinsed (inside and out) before proceeding.



- 1) Connect the syringe to the 3-way valve & hose.
- 2) To rinse, place the end of the rubber tube into the river or holding bottle. Turn the 3-way valve position so that "off" is in-line with the dispensing tip.



When the "off"
position is pointing
towards the tube,
water can be
expelled through
the
dispensing tip.




With the 3-way valve in this position, the syringe will draw water through the tube and into the syringe.

- 3) Draw a small amount of water (about 25 mL) into the syringe. Turn the valve position so that "off" is pointing towards the tube.
- 4) Continue to draw the syringe end all the way out. At this point only air should be entering the syringe. Shake to rinse the syringe, and then squirt all of the water out the dispensing tip. Repeat 2 more times.

Filtered Bottles:

~ Nutrient, DOC, Anion and Cation


All of the sample bottles will be filled with filtered water. The water is filtered using a GMF (glass microfiber) filter that is connected to the end of the syringe. The filter can either be connected directly to the syringe or to the 3-way valve connected to the syringe.



1) Fill the syringe completely from the holding bottle of sample water using the 3-way valve connection (if applicable).



OR



- 2) Place the GMF filter onto the syringe.
- 3) Remove cap from bottle and place face-up in a safe place.

4) One at a time, fill each bottle with filtered water up to the shoulder (Anion, Cation, 2 Nutrients, DOC). Securely replace the cap on the bottle.

5) Re-fill the syringe as needed throughout the filtering process. Each filter can be used until it is too difficult to filter water through.

Always use new filters at a new site location.

6) Record any observations or procedural mishaps in the comment section of the field sheet.



The "shoulder" of the bottle is where it starts to curve at the top.

Stable Water Isotopes ~ 018:

The isotopes glass vial is filtered, but is filled completely to the top until a meniscus forms (round curve of water). There should be no air bubbles in the vial.




- 1) Using the 3-way valve (if applicable), fill the syringe with sample water from the holding bottle.
- 2) Place a GMF filter on the syringe.
- 3) Remove cap from the vial and place face-up in a safe place.
- 4) Fill with filtered water completely to the top. Replace the cap carefully and securely. (There should be no air bubbles in this sample once the cap is in place; you can check by turning the bottle upside-down. No air bubbles should appear.)
- 5) Record any observations or procedural mishaps in the comments section of the field sheet.

Labeling Sample Bottles:

Labeling each bottle in the sample is very important. The bottles have white labels that need to be filled out with the <u>Date</u>, <u>Time and Site Name</u>. This label will be identical to the information on the top right hand corner of the field sheet. When the bottles are sent to the USGS lab they are split up and sent with hundreds of other bottles to different labs to be analyzed. The label is an important part of the tracking and identification of your sample, so writing clear and consistent information on each bottle is extremely helpful.







Jay Hootch & Earl Alstrom, Yupiit of Andreafski, assist with lab work at USGS Boulder, CO.

Quality Control

When we collect water samples, we always work to reduce any sources of error that might affect our measurements. There are two types of error that we work to reduce: bias and variability.

Bias is systematic, directional error. We can work to reduce bias by calibrating our field meters with reference materials (such as pH buffers and conductivity standard solutions) and by collecting blank samples.

Variability is random error. We can work to reduce variability by standardizing our methods and by collecting replicate samples.

The goal of quality control (**QC**) sampling is to identify, quantify, and document bias and variability in data that result from the collection, processing, shipping, and handling of samples. The bias and variability associated with environmental data must be known for the data to be interpreted properly and to be scientifically defensible!

Blank Samples

The primary purpose of a blank sample ("blank") is to measure the concentration of anything that might have been introduced into the sample as a result of sampling-related activities: collection, processing, shipping, and handling. Blank water is specially prepared in a quality-controlled laboratory and always carries a special certificate. It is not the same as the distilled/deionized water we use to rinse our sampling equipment. It is really important to wear gloves and to use caution when working with blanks: blank water is expensive!

Blank Samples should be collected the first and last time we visit our sampling sites every season.

How to collect a Blank Samples?

- 1) Ensure that you're wearing gloves!
- 2) Rinse your sampling equipment (holding bottle, syringe, three-way valve, and tubing) three times with DI water.
- 3) Rinse your sampling equipment (holding bottle, syringe, three-way valve, and tubing) once with blank water.
- 4) Fill the holding bottle with blank water.
- 5) Follow the normal procedure for filtering water outlined on Page 32. Before filling your sample bottles, be sure to push some blank water through the filter.

Duplicate Samples:

The primary purpose of duplicate/replicate samples is to identify and/or quantify the variability associated with sample collection and processing. Duplicate samples are collected simultaneously or close in time with the associated water sample, using identical procedures.

Duplicate Samples should be collected from each sampling site once every season. Duplicate Samples should be collected twice from a site only if more than 10 samples are collected at the site in a single season.

How to collect Duplicate Samples?

- Use identical sampling procedures and supplies to collect two samples, one immediately after the other, using the normal sampling procedure. Remember to rinse your sampling equipment (holding bottle, syringe, three-way valve, and tubing) before collecting the second sample, just as you did before you collected the first sample.
- 2) Label the samples using the site name you always use, but add "**DUP 1**" to the first sample collected and "**DUP 2**" to the second sample collected. It's that easy!

Shipping Samples

Pack samples **CAREFULLY**! Use foam sleeves for glass vials and place all bottles in the large Ziploc bag. Field sheets should be folded in quarters with the date, time, and site name facing out. Place the folded field sheet in the small Ziploc bag and place the small Ziploc bag inside the large Ziploc bag so the date, time, and site name is visible through the bags. Place a frozen ice pack in the bottom of the cooler with the sample! Turn the shipping label over so it reads "**TO: YRITWC Science Program**". Tape the cooler shut and drop the sample off for the flight out. Give the YRITWC Science staff a call or email to let them know the sample is on the way and what flight it was sent on.

- * If you are unable to ship the sample the same day you collect it, please keep the sample refrigerated!
- ** Plan your field day so that you are sampling at the beginning of the week and shipping out your sample(s) by the middle of the week or early in the week for Yukon communities.

1. Double check field sheet & bottle labels. Place glass bottles in protective sleeves & field sheet in Ziploc bag.

2. Pack gallon size bag with sample bottles and field sheet. Gather cooler and frozen ice pack.







3. Place a frozen ice pack in the bottom of the cooler. Place sample kit in the cooler with the field sheet facing out.

4. Secure shipping label to cooler and send via freight collect to YRITWC staff. Notify staff of shipment.

Appendices

Appendix A: Solution Temperature Chart Conductance pH 10

Temp °C	Temp °F	μS
5	41	896
10	50	1020
15	59	1147
16	60.8	1173
17	62.6	1199
18	64.4	1225
19	66.2	1251
20	68	1276
21	69.8	1305
22	71.6	1332
23	73.4	1359
24	75.2	1386
25	77	1413
26	78.8	1440
27	80.6	1467
28	82.4	1494
29	84.2	1521
30	86	1548
31	87.8	1575

Temp °C	Temp °F	рН
0	32	10.33
5	41	10.25
10	50	10.18
15	59	10.11
20	68	10.05
25	77	10.00
30	86	9.95
35	95	9.92
40	104	9.88
45	113	9.85
50	122	9.82
55	131	9.9
60	140	9.77
70	158	9.73
80	176	9.69
90	194	9.66

Temp °C	Temp °F	рН
0	32	7.12
5	41	7.09
10	50	7.06
15	59	7.04
20	68	7.02
25	77	7.00
30	86	6.99
35	95	6.98
40	104	6.98
45	113	6.97
50	122	6.97
55	131	6.98

60

70

80

90

140

158

176

194

6.98

6.99

7.00

7.02

pH 7

Appendix B: Water Quality Sites

Water Quality Sites (Alphabetical Order)

Site ID	Water body Name	Lat. (DD)	Long. (DD)	Elevation (m)	Location
akhpb1a (ukhpb1a)	Akuliqutaq Slough	61.538106	-166.11165	0	AK
alaet1a	Alatna River	66.570038	-152.627086		AK
ananv1a	Anvik River	62.6667	-160.281666	30	AK
anksm1a	North Fork Andreafski River	62.0538	-163.143034	20	AK
atysq1a	Atlin Lake above Atlin	59.43835	-133.6704	670.6	вс
atysq1b	Atlin Lake below Atlin	59.5988	-133.8151	671	вс
bctal1a	Bear Creek	65.261203	-151.939132	1188	AK
bcyxq1a (WFN08)	Beaver Creek	62.363469	-140.867188		YT
becfa1a	Bennett Lake Outlet	60.162931	-134.715083	671	YT
bihpb1a	Big Lake at Hooper Bay	61.504682	-166.125352	0	AK
blcik1a	Black River	66.654696	-143.711580		AK
bohpb1a	Bone Pond at Hooper Bay	61.500405	-166.110114	1.55	AK
chfai1b	Chena River mouth	64.80247	-147.915335	137	AK
chfai5a	Upper Chena River at Doug's	64.8458	-147.3306	138.99	AK
chfai6a	Upper Chena River above FAI	64.847033	-147.40735	136.55	AK
chvee1a	Chandlar River above Venetie	67.019133	-146.430367	174.95	AK
chvee2a	Chandlar River above Venetie	67.02187	-146.53297	201	AK
chvee3a	Chandlar River above Venetie	67.02171	-146.58717	201	AK
clsmk1a	Clear Lake at St. Michaels	63.4934	-162.1697	3.41	AK
cld661a (cldbb1a)	Clear Water Creek	64.0537	-145.4306	320	AK
clwbb1a	Clear Lake at Stebbins	63.4982	-162.2311	1.83	AK

Site ID	Water body Name	Lat. (DD)	Long. (DD)	Elevation (m)	Location
crarc1b	Chandlar River at Arctic Village	68.12965	-145.5378	650	AK
doydb1a (WFN07)	Donjek River	61.6787	-139.75583	845	YT
emcfa1a	Emerald Lake	60.26336	-134.75021	701	YT
hefai1a	Hess Creek	65.665797	-149.096603	137	AK
hohsl1a	Hog River	65.731591	-156.549833	67	AK
hstal1a	Hay Slough	65.13805	-151.68367	68	AK
klyda1a	Klondike River	64.05661	-139.04849	381	YT
klydb1a (KFN03)	Kluane Lake	61.28275	-138.85597	827	YT
kohsl1a	Koyukuk River above Huslia	65.700264	-156.420615	161	AK
kohsl2a	Koyukuk River above Huslia	65.9936	-156.3995	61	AK
kokyu1a (kogal1a)	Koyukuk River	64.922139	-157.541389	36	AK
licfa1a	Little Atlin Lake	60.29758	-133.98729	684	YT
nahpb1a	Naparyaraq Slough	61.542056	-166.078857	0	AK
nettw1a	Nenana River	63.54082	-148.80773	603	AK
nivak1a	Ninglivvak River	61.546145	-165.574104	9.1	AK
pecfq1a	Pelly River at Pelly Crossing	62.82325	-136.54056	464	YT
pofyu1a	Porcupine River	66.592778	-145.278611	419	AK
pofyu2a	Porcupine River at Hubert Camp	66.989764	-143.139644	164	AK
styma1a	Stewart River	63.45391	-136.94199	549	YT
spcfa1a	Spirit Lake	60.246954	-134.743623		YT
tacfa1b	Tagish River	60.293428	-134.262472	653	YT
tacfa1a	Tagish River	60.28056	134.606861	659	YT
tafai1b	Tanana River below FAI	64.7895	-147.9593	137	AK
tafai2a	Tanana River above FAI	64.546864	-147.05393	188	AK

Site ID	Water body Name	Lat. (DD)	Long. (DD)	Elevation (m)	Location
tafai3a	Tanana River above Eilson	64.3378	-147.8682	337	AK
tantal1a	Tanana above Tanana	65.165752	-152.063433	68	AK
tanen1a	Tanana River at Nenana	64.5662	-149.0914	112	AK
tatok2a	Tanana above Tok	63.317304	-142.649344		AK
tayxy1a	Takhini River	60.841586	-135.187375	455	YT
teyzw1a	Teslin Lake	60.0866	-132.6006	688	YT
teyzw1b	Teslin River	60.4819	-133.5917	681	YT
teyzw2b	Teslin River	60.485073	-133.30155	681	YT
tomnt1a	Tolovana River	65.161952	-149.129826	347	AK
tomnt2a	Tolovana River	65.470881	-148.269057		AK
wacfa1a	Watson River	60.17986	-134.73723	660	YT
whyda1a	White River	61.198717	-140.55804	366	YT
yuanv1a	Yukon River above Anvik	61.671712	-160.196997	36	AK
yuauk1a	Yukon River at Alakanuk	62.684716	-164.618425	9.6	AK
yubri1a	Yukon River at Bridge	65.876033	-149.717917	80	AK
yucex1a	Yukon River at Carmacks	62.117628	-136.262678	652	YT
yucrc1a	Yukon River at Circle	65.824603	-144.053665	211	AK
yueaa1a	Yukon River at Eagle	64.7828	-141.1767	268	AK
yuemn1a	Yukon River at Emmonak	62.758767	-162.479	0	AK
yufyu1a	Yukon River at Fort Yukon	66.5588	-145.2776	130	AK
yugal1a	Yukon River at Galena	64.719778	-156.752639	142	AK
yukal1a	Yukon River at Kaltag	64.343999	-158.710299	37	AK
yukot1a	Yukon River at Kotlik	63.041389	-163.669722	3	AK
yuksm1a	Yukon River at St. Mary's	62.0521	-163.4067	7	AK
yukyu1a	Yukon River above Koyukuk	64.874555	-157.719206	34	AK
yumll1a	Yukon River at Marshall	61.83875	-162.141806	4	AK

Site ID	Water body Name	Lat. (DD)	Long. (DD)	Elevation (m)	Location
yupqs1a	Yukon River at Pilot Station	61.945429	-162.835091	7	AK
yupqs1b	Yukon River at Pilot Station	61.93036	-162.88005	5.9	AK
yurby1a	Yukon River at Ruby	64.745433	-155.488733	42	AK
yursh1a	Yukon River at Russian Mission	61.841914	-161.305256	8	AK
yurmp1a	Yukon River at Rampart	65.53022	-150.131556	68	AK
yusvs1a	Yukon River at Steven Village	65.992962	-149.05644	87	AK
yutal1a	Yukon River at Tanana	65.165752	-152.063433	68	AK
Yuwbq1a	Yukon River at Beaver Village	66.352713	-147.358952	100	AK
yuyda1a	Yukon River at Dawson	64.028337	-139.478131	320	YT
yuyxy1a	Yukon River above Whitehorse	60.5735	-134.6696	652	YT
yuyxy1b	Yukon River below Whitehorse	60.839186	-135.180167	633	YT

Appendix C: Field Sheet

Page 1 of 2

	ONE PEOPLE-ONE RIVER		Date (yyyy	-mm-dd):				
			Sample Ti	me (24 hrs):				
V.1.	P' L. T. IW.		Site Name	ID:				
Yukon River Inter-Tribal Watershed Council Fairbanks: 907-451-2530 • Whitehorse: 867-393-2199			Waterbody Name:					
Technic	cian(s):				·			
Meter T	ype(s) (circle): H	anna YSI	Pro YSI	63/550A	YSI 650	Meter ID(s)	#:	
	, , , ,		Calibrati	on Doto		. ,		
nH Cali	hration (VCLC2 VCLBro	VCLGEO, and Ha	Calibrati		bo within 0.1 of	huffar valuas i	f not RECALIR	DATE
pri Can	bration (YSI 63, YSI Pro		ппа) рп / а	ina to need to	be within 0.1 of			
	pH 7 Buffer Reading:				•	Buffer Read		
	uffer Temperature (°C)				oH 10 Buffer To	emperature ((°C):	
	ed Oxygen (DO) Cali		o, YSI 650, 550,					
	tric Pressure (inHg): _		,		ading (%) Satu			004751
Visit wwv	v.weather.gov and type in	your community	s zip coae.		eeds to be betwe			3RAIE!
					DO Reading (mg/L):		
Conduc	ctivity Calibration (YS	l 63, YSI 650, Har	nna)					
Conduc	ctivity Standard Used (μS/cm):		Conductivit	y Solution Tem	nperature (°0	C):	
Conduc	ctivity Reading (µS/cm)):	-					
			Field	Data				
	pH:	A	ir Temperatur	re (°C):		Latitude:		
Dissolved Oxygen (%): Water Temperature (°C): Longitude:								
Dissolved Oxygen (mg/L): Ice Thickness (cm): Elevation (m):								
Cond	luctivity (µS/cm):							
		Sai	mple Collec	tion Check	list			
	Parameters	Anions big plastic bottle	Cations tall, thin plastic bottle	Nutrients small plastic bottle	Nutrients small amber glass bottle	DOC large amber bottle	Isotopes tiny glass vial	
Sa	amples Collected (check]
Did you	Did you enter your field measurements into FieldScope at yukon.fieldscope.org/v3/? (circle) YES						NO	
Did you	Did you take photos and email them to YRITWC at science@yritwc.org? (circle) YES NO						NO	
Did you take duplicates? (circle) YES NO Did you take field blanks? (circle)					YES	NO		
				Page ⁻	1 of 2 (initial w	hen complete	e):	

Appendix C: Field Sheet cont. Page 2 of 2

RIVER AND WEATHER Weather conditions now (circle): overcast / clear / partly cloudy / cloudy • heavy / steady / intermittent rain • calm / breezy / windy Weather in past 24 hours (circle): overcast / clear / partly cloudy / cloudy • heavy / steady / intermittent rain • calm / breezy / windy Sample location (circle): mid-channel / bank / other • riffle / pool / eddy Flow description (circle): < 5 gallons per second / > 5 gallons per second / under ice Water clarity (circle): clear / cloudy (greater than 4" visibility) / murky (less than 4" visibility) Site odor (circle): none / fresh algae / chlorine / rotten eggs / sewage / other: Other (circle): litter / foams or suds / oily sheen / algae and/or aquatic plants Anything different happening with the river since the last sample (flooding, erosion, flow change)? How does the river height compare to two weeks ago? How does the river height compare to this time last year? Anything noteworthy happening with the weather? **WILDLIFE** Any specific concerns the YRITWC should know about wildlife? Any noteworthy wildlife or fish species traveling through your community or nearby? **CONTAMINANTS** Has anything occurred since the last sampling that might have affected the water quality at your site? Is there any other site that your community wants monitored? Please explain why you're concerned... **OTHER** Anything else interesting? Please write your comments or observations...

Page 2 of 2 (initial when complete):

Are there any issues with this sample that we should know about?

Appendix D: General Explanation of the Water Quality Parameters

Water Quality Parameters: Definitions along with Environmental, Human, and Drinking Water Impacts

pН

Definition: pH is a measure of the basic or acidic nature of a solution and varies inversely with the amount of hydrogen ions present in water. Low values of pH indicate acidic waters whereas high values of pH indicate basic waters. The number seven is right in the middle so it is considered neutral. pH can affect the concentration of the anions, cations and nutrients (see below) that are dissolved in the water so it is a very important indicator of water quality.

Drinking Water and Human Health: The pH level of drinking water does not have human health impacts. However, the Environmental Protection Agency (EPA) does *recommend* pH levels between 6.5 and 8.5 for drinking water.

Environmental Impact: Animals have a pH range that they thrive in. If their living environment fluctuates outside of that range they could die or become ill. A pH range of 6.0 to 9.0 provides a healthy environment for freshwater fish and invertebrates.

Dissolved Oxygen (DO)

Definition: An analysis of dissolved oxygen tests the amount of DO that is in the water. Oxygen gets into water by aeration (rapid movement), by diffusion from the air, and as a product of photosynthesis.

Drinking Water and Human Health: A high level of DO in drinking water is good because it makes the water taste better. However, high levels of dissolved oxygen speed up corrosion of water pipes.

Environmental Impact: If the concentration levels of total dissolved gas in water go over 110% it is harmful to aquatic life. Fish and aquatic invertebrates can -however rarely - experience "gas bubble disease" and die. Even though too much can be bad, some DO is entirely necessary for good water quality because life depends on oxygen. The amount of DO that an aquatic organism needs is dependent on the species of the animal, the water temperatures, the animals' physical state, and the pollutants present in the water. At higher water temperatures fish species are using more oxygen because their metabolic rate increases. Research suggests that 4 to 5 mg/L is the minimum amount of DO that can support a large and diverse fish population. Good fish habitat generally averages around 9 mg/L of DO. Fish die when DO levels fall below 3 mg/L or climb above 17 mg/L.

Conductivity

Definition: Water's conductivity refers to its ability to conduct electricity. Electrical current is transported by the ions that are present in the water. The concentration of

ions in a water source is commonly called <u>total dissolved solids</u> or <u>TDS</u>. All of the dissolved solids in water are either negatively charged ions - **anions** (such as bicarbonate, sulfate, chloride, silica, nitrate, carbonate, fluoride, and boron) or positively charged ions - **cations** (such as sodium, calcium, magnesium, potassium, iron, strontium). The conductivity of water increases as the number of ions increases, therefore a higher TDS reading, or conductivity reading, means that there are more anions and cations present in the water. Generally, pure water has a low conductance whereas seawater has a high conductance.

Drinking Water and Human Health: Total Dissolved Solids are not known to cause many human health problems, but are more likely to have aesthetic influences; they can contribute to the corrosion of plumbing. TDS can cause drinking water to taste unpleasant and/or to look murky in appearance. Water becomes saline at extremely high levels of TDS, therefore, water is not recommended for drinking when the TDS reads above 500 mg/L or when specific conductance is above 750 μS/cm. In some causes high levels of TDS can cause gastrointestinal irritation.

Environmental Impact: Excess TDS can destroy food necessary for certain plants and animals. Also, high levels of dissolved solids can cause metallic surfaces to corrode or become encrusted.

Temperature

Definition: Temperature tells us how hot or cold the water is. Temperature can affect the ability of water to conduct an electrical current, to hold oxygen and certain dissolved solids, and to undergo various reactions.

Drinking Water and Human Health: None

Environmental Impact: While temperature can vary greatly (seasonal or even within the day), consistently high water temperatures are detrimental to most fish species (salmon, whitefish, shellfish, etc.).

Nutrients

Definition: A nutrient is a chemical that an organism needs to live and grow. There is a long list of the different kinds of nutrients that can exist in a body of water. Natural sources of nutrients include soils and decaying plants materials (fallen leaves, grass etc.). Sometimes nutrients dissolved in water come from human and animal wastes, fertilizers, or industrial wastewater. Phosphorus and Nitrogen are often closely tested for because they are good indicators of the health of a watershed. There are two nitrogen-bearing nutrients that we analyze:

<u>Nitrate:</u> Small amounts of nitrate (NO3) dissolve in the water when it reacts with decaying plant and animal material in the soil. Sometimes nitrate dissolved in water comes from human or animal wastes and fertilizers.

<u>Ammonium:</u> As with nitrate, small amounts of ammonium (NH4) dissolve in the water when it reacts with decaying plant and animal material in the soil. Sometimes ammonium dissolved in water comes from human or animal wastes and fertilizers.

Other nutrients: Other nutrients that we analyze include sulphate (discussed below) and dissolved organic carbon (or "DOC"; discussed below).

Drinking Water and Human Health: Nutrients are essential for life but too many of them can pollute drinking water. Extremely high levels of nitrate (a type of nutrient that we test for) can be toxic, especially to young infants. There is very little risk from ammonium (the other type of nutrient that we test for) at the low levels normally encountered in the Yukon River watershed.

Environmental Impact: Nutrients are important for aquatic animals to live, but too many nutrients degrade aquatic habitat because they can cause algae to grow excessively and lower the dissolved oxygen in the water. This is called eutrophication. Most nutrient tests will look for total oxidized nitrogen (NO₂ + NO₃) because NO₂ is poisonous to fish and is known to contribute to the overgrowth of algae. Ammonium (NH₄) is also measured because in high concentrations it can be toxic to fish and other animals.

Stable Water Isotopes

Definition: Some molecules of water are lighter or heavier than others because of something called "isotopes." We measure the isotopes in water to understand where the water comes from (ice? snow? rain? groundwater?) and how the water is moving from one place to another.

Drinking Water and Human Health: Stable water isotopes pose no risk to human health.

Environmental Impact: Stable water isotopes pose no risk to the health of the river. They can help us understand long-term trends in the watershed, including the effects of climate change. Different isotopes behave differently. Lighter water molecules (that is, water with more light isotopes) are more easily evaporated. Heavier water molecules (that is, water with more heavy isotopes) are more easily precipitated as rain or snow. Isotopes can also be used to trace the origin of water due to the way it fluctuates based on factors such as amount of precipitation, altitude, geothermal activity, snow melt, tree presence, location (O18 levels tend to decrease farther from the coast), temperature, and much more.

Dissolved Organic Carbon (DOC)

Definition: DOC or dissolved organic carbon merely refers to a wide range of organic molecules that exist in a water system. In general, organic carbon compounds come from the decomposition of plants and other dead organic matter.

Drinking Water and Human Health: DOC attaches to metals when it comes in contact with them. Some heavy metals like cadmium and mercury are toxic. When fish eat the DOC that has toxic metals attached, these toxins are carried onto the consumer...us!

Environmental Impact: DOC is a nutrient and varies in every body of water. DOC is important and essential for life, especially for microorganisms: tiny life forms like algae, bacteria and fungi. These tiny life forms are the start of the food chain! Our

health depends on the health of the fish, which depends on the health of these microorganisms. Most DOC occurs naturally, but sometimes high concentrations are a result of human influence. What is important to note about DOC measurements are large or sudden changes. Such changes could be signaling to a bigger problem.

Anions

Definition: lons are dissolved particles that have charge. Anions are negatively charged ions. There are three anions that we measure:

<u>Alkalinity:</u> Alkalinity is a measure of the capacity of water to neutralize acids.

<u>Sulphate</u>: Sulphate is a nutrient. Usually the source of sulphate dissolved in water is natural, but sometimes it comes from fertilizers, mining operations, pulp and paper mills, canneries or other sources.

<u>Chloride</u>: Some chloride dissolves in the water when it reacts with salts in the rocks and the soil. However, chloride dissolved in water often comes from other sources such as human or animal wastes, which are high in salt, or from salt used on roads for snow and ice control.

Drinking Water and Human Health: High concentrations of the anion chloride usually cause water to taste bad and could cause pipes to corrode.

Environmental Impact: The anion Alkalinity is important for fish and aquatic life because it can help prevent rapid pH changes. Remember that living organisms generally function best in a pH range of six to nine.

Cations

Definition: lons are dissolved particles that have charge. Cations are positively charged ions. There are four cations that we measure:

<u>Calcium:</u> Calcium dissolves in the water when rain falls, infiltrates the ground, and reacts with rocks and soil.

<u>Magnesium:</u> Magnesium, like calcium, dissolves in the water when rain falls, infiltrates the ground, and reacts with rocks and soil.

<u>Sodium:</u> Sodium, like calcium and magnesium, dissolves in the water when rain falls, infiltrates the ground and reacts with rocks and soil. Sometimes sodium dissolved in water comes from human or animal wastes, which are high in salt, or from salt used on roads for snow and ice control. In lower river communities, it is possible that sodium comes from seawater that the tides are pushing up into the river.

<u>Potassium:</u> Potassium, like the other cations, dissolves in the water when rain falls, infiltrates the ground, and reacts with rocks and soil. Sometimes potassium dissolved in water comes from fertilizers.

Drinking Water and Human Health: There is currently no evidence of negative health effects on humans caused by calcium, magnesium, or potassium in water. When sodium concentrations are very high, the water usually tastes bad. When water does

not contain much calcium and magnesium, we say that it is "soft water." When water contains a lot of calcium and magnesium, we say that it is "hard water." Hard water requires a lot of soap to produce lather. It can also form white deposits called "scale" that can clog hot water pipes, boilers and other household appliances.

Environmental Impact: There is currently no evidence of negative health effects on aquatic life caused by calcium, magnesium, or potassium in water.

Greenhouse Gasses

Definition: A greenhouse gas can absorb and release energy from the sun and ultimately cause the greenhouse effect that keeps our planet warm. Increasing amounts of greenhouse gases contribute to climate change. Greenhouse gases are in the air but they can also dissolve into the water, just like oxygen does. We measure two greenhouse gases:

<u>Carbon dioxide</u>: Every time we breathe out, we are putting some carbon dioxide into the air. Carbon dioxide is also produced whenever we burn fossil fuels like gas, coal or diesel. When the climate warms, the permafrost can melt and release carbon dioxide.

<u>Methane</u>: Methane is the main ingredient in what we call "natural gas." It naturally occurs underground but can also come from manure, landfills, and other places. When the climate warms, the permafrost can melt and release methane.

Drinking Water and Human Health: Carbon dioxide and methane are typically found in small amounts in natural water samples, so they generally pose no risk to human health.

Environmental Impact: It's important to monitor how much carbon dioxide and methane are in our water samples because it helps us determine how much climate change is occurring and how climate change is affecting our watershed. Carbon dioxide and methane are typically found in small amounts in natural water samples, so they generally pose no risk to the health of the river.

Appendix E: Resources

Equipment Retailers:

TTT Environmental, LLC

4201 B St.

Anchorage, AK 99503 Phone: 907-770-9041 Fax: 907-770-9046

Website: www.tttenviro.com Email: info@tttenviro.com

Instrumentation Northwest

19026 72nd Ave. S Kent, WA 98032

Phone: 253-872-0284 Fax: 253-872-0285

Website: www.inwusa.com Email: sales@inwusa.com TTT Environmental, LLC 915 – 30th Ave., Unit 103 Fairbanks, AK 99701 Phone: 907-374-9040 Fax: 907-374-9045

YSI Inc.

Integrated Systems & Services

Phone: 1-877-392-9950

Website: www.ysi.com/system
Website: system@ysi.com/system

Online Tools:

www.yritwc.org/science

- Field Manual
- Published Open File Reports
- ➤ USGS-YRITWC Fact Sheet
- Link to USGS ScienceBase water quality database

Appendix F: Budget Recommendations

		Cost			
	<u>ltem</u>	Open Water (8 samples)	Year- round (12 samples)	<u>Description</u>	
	Lab Analysis for Cation & Anions	\$2,720	\$4,080	Anions and Cations, including heavy metals scope per sample \$340	
Sampling Cost:	Calibration Solution	\$45.00	\$90.00	\$10 per liter (pH 7, pH 10)	
	Shipping	\$280.00	\$420.00	\$35 per sample (This is a current estimate. Your location does dictate exact cost)	
	YSI meters	\$50.00	\$50.00	Rental cost for season, this cost covers maintenance!	
	YSI Multiparameter Probe purchase			\$2,480 - call if you would like to purchase	
	TOTAL	\$3,095.00	\$4,640.00		
ION	<u>Item</u>	Cost		<u>Description</u>	
Training Cost	Transportation	\$1,200.00		Round trip ticket *please adjust according to location	
Anchorage:	Per diem	\$375.00	\$75/day		
	Lodging	\$580.00	\$145/night		
0	Tools and all				
On-site visit:	Transportation			covers trainer's travel to your location *adjust to location	
	TOTAL (est.)	\$2,155.00			